

FIG. 2

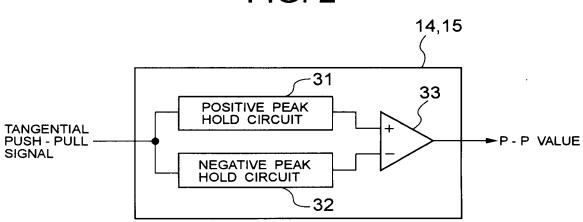


FIG. 3

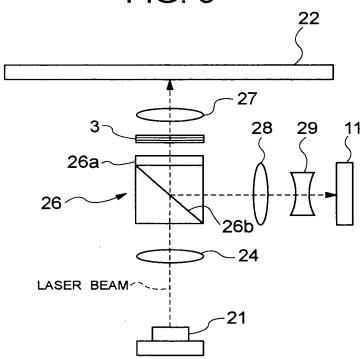


FIG. 4

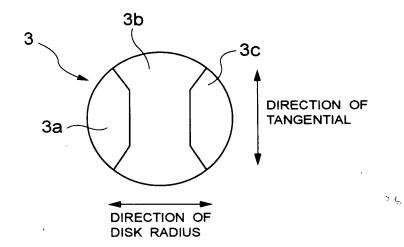


FIG. 5

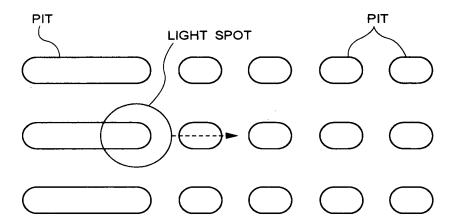


FIG. 6


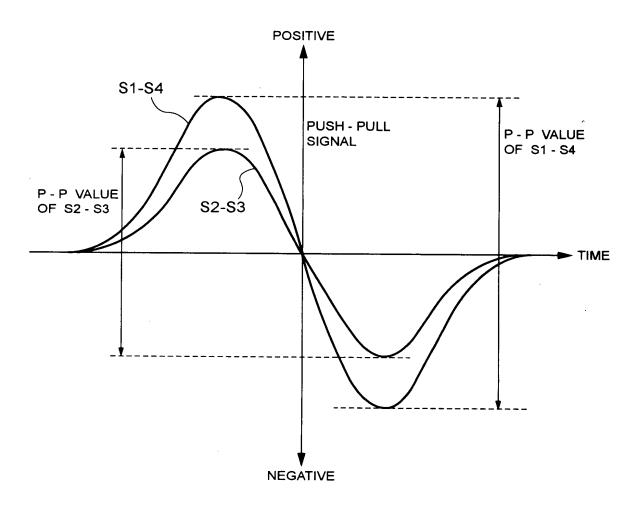


FIG. 7

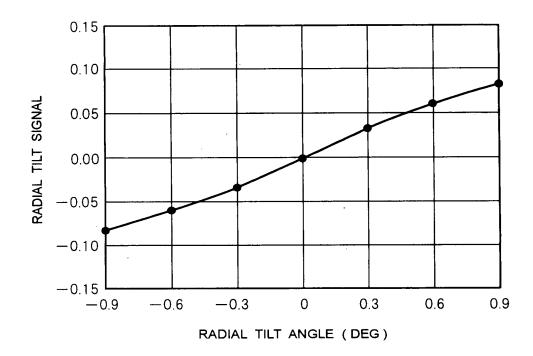

6 / 18



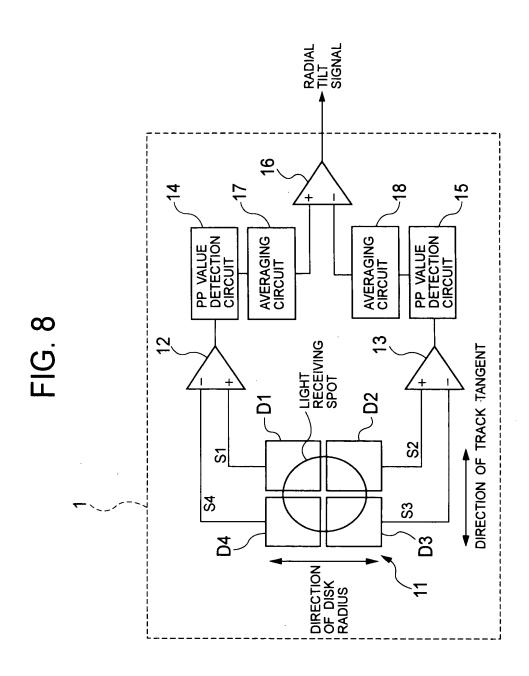


FIG. 9

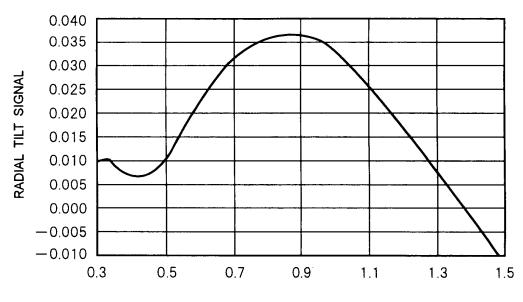


NORMALIZED FREQUENCY OF PITS

8 / 18

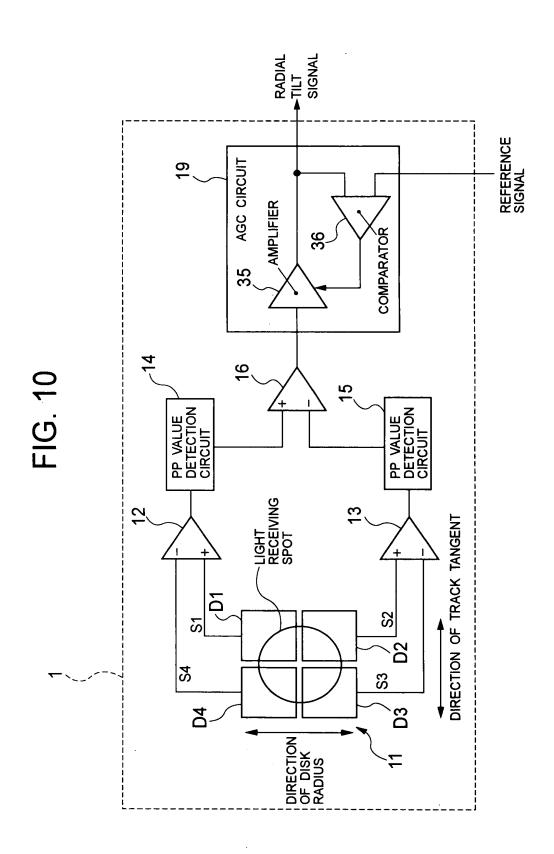

9/18

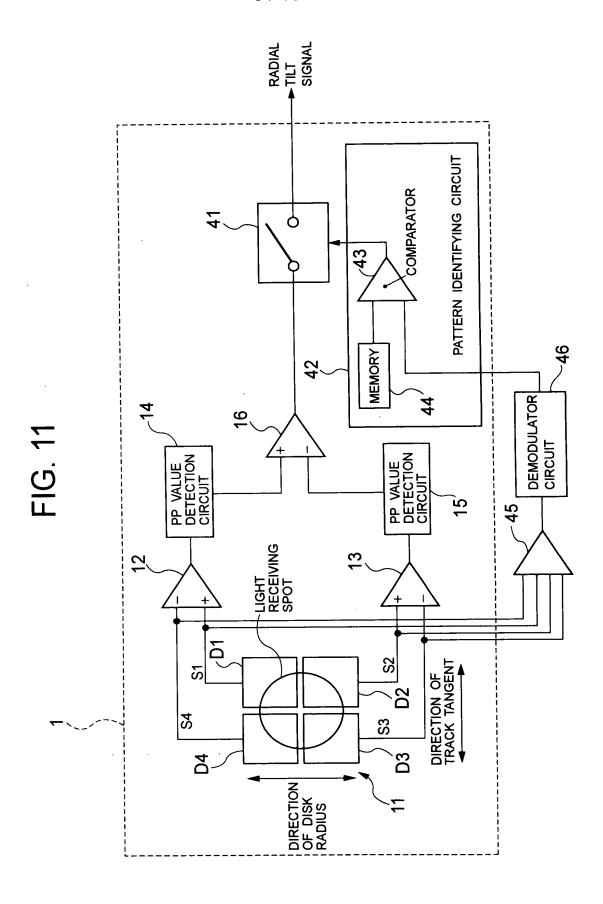

10 / 18

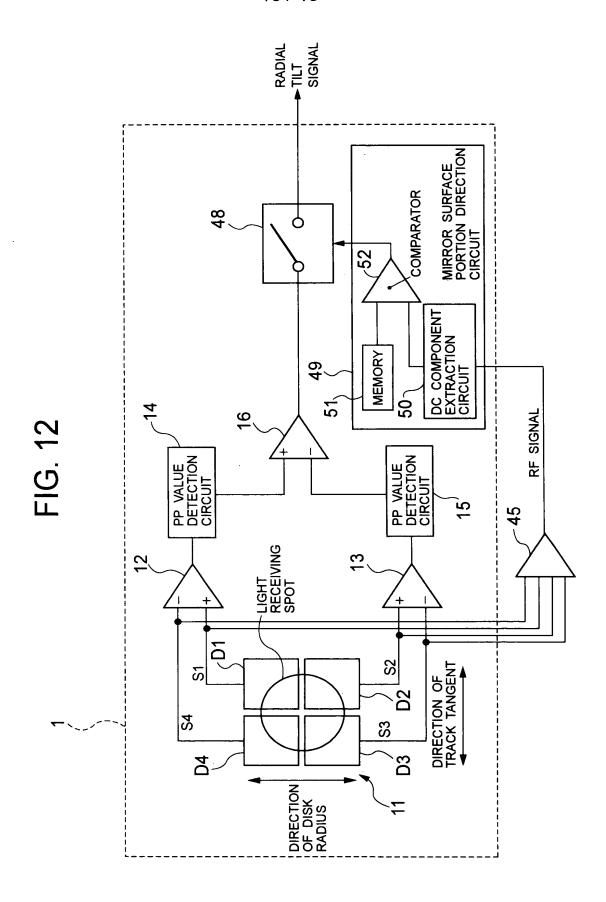


FIG. 13

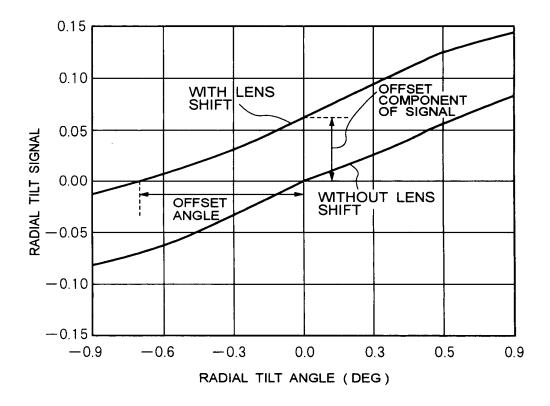


FIG. 14

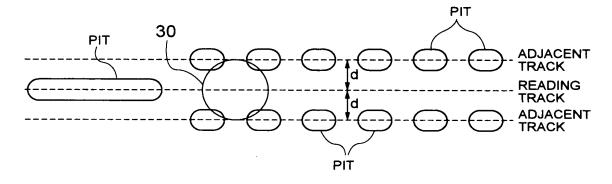


FIG. 15


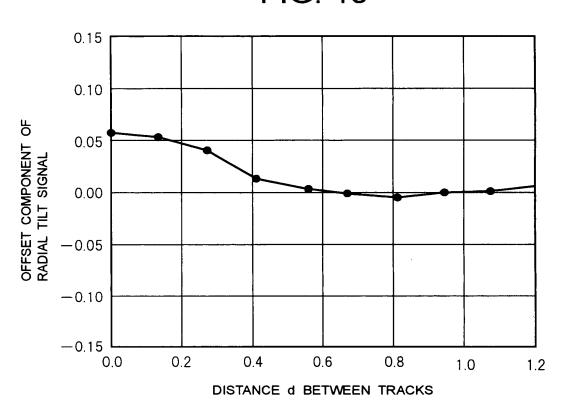


FIG. 16

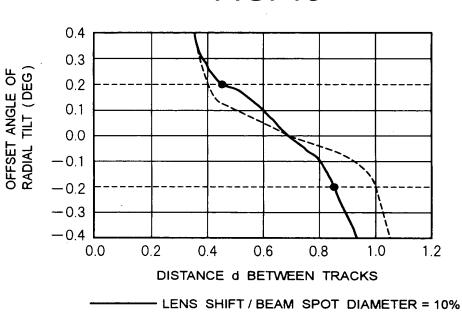

----- LENS SHIFT/BEAM SPOT DIAMETER = 6%

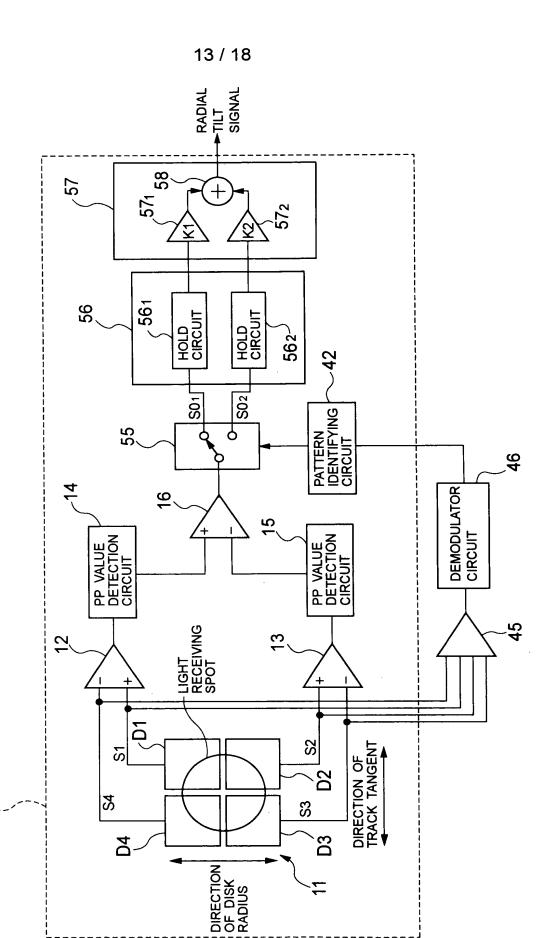


FIG. 17

14 / 18

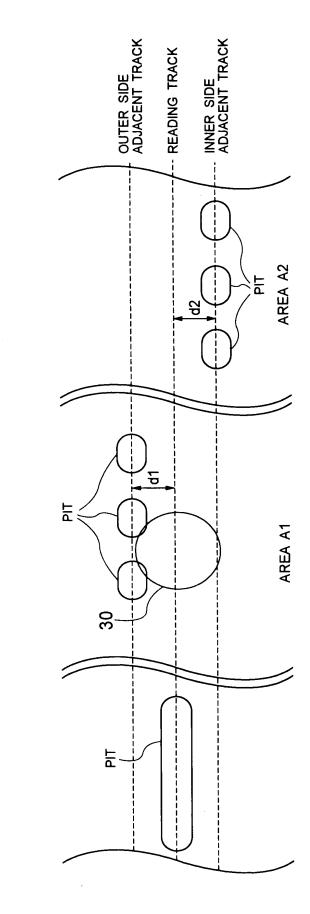


FIG. 18

15 / 18


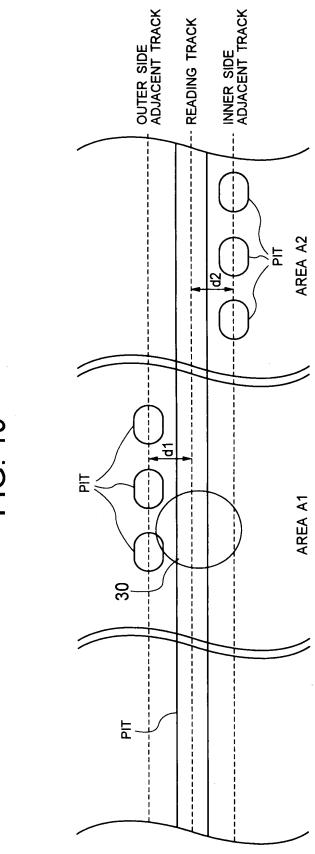


FIG. 19

FIG. 20

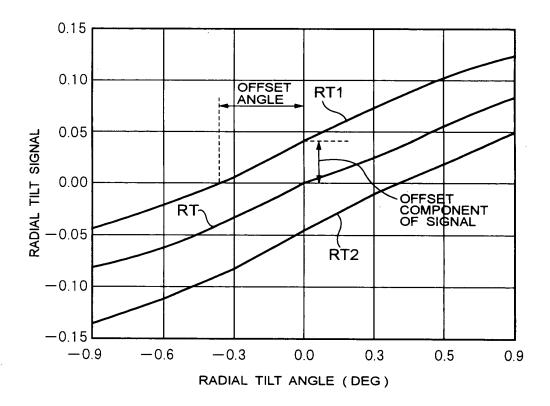

17 / 18

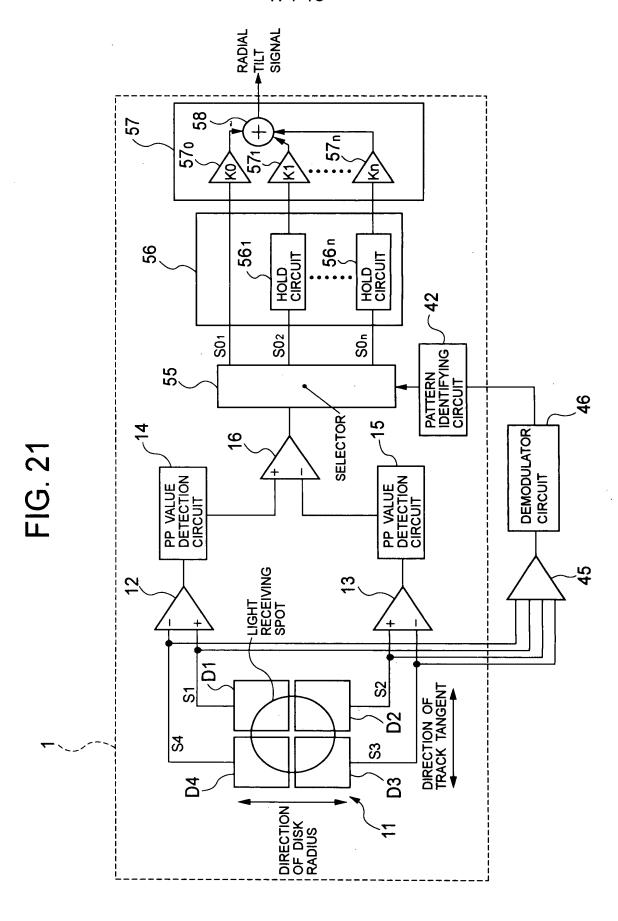


FIG. 22

